


Filter Housings

10" and 20" Standard Filter Housings

SH
SERIES

Pure Aqua's 10" and 20" standard filter housings are constructed of a durable reinforced polypropylene or clear Styrene-Acrylonitrile (SAN). Pure Aqua's line of standard filter housings are available in many different colors, styles and connections sizes. Pure Aqua's housings will accommodate a wide range of 2-1/2" or 2-5/8" diameter cartridges. The reinforced polypropylene cap offers an optional pressure-relief button on the inlet side to relieve pressure inside the housing when changing filter cartridges.

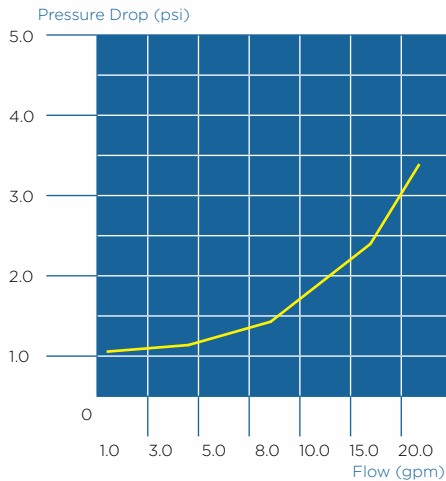

Applications

- 💧 Reverse osmosis pre-filtration
- 💧 Reverse osmosis post-filtration
- 💧 Food & beverage industry
- 💧 UV pre-filtration
- 💧 Residential
- 💧 Commercial
- 💧 Industrial

10" Length (2.5" Diameter)

Part Number	Description	Inlet Size (in)	Outlet Size (in)
H-1034-BL	Blue 10"	3/4"	3/4"
H-1034-CL	Clear 10"	3/4"	3/4"

20" Length (2.5" Diameter)

Part Number	Description	Inlet Size (in)	Outlet Size (in)
H-2034-BL	Blue 20"	3/4"	3/4"
H-2034-CL	Clear 20"	3/4"	3/4"

Features & Benefits

- 💧 Easy installation
- 💧 Thick walls for increased strength
- 💧 Leak-proof seal
- 💧 Wide range of connection sizes
- 💧 Wide range of colors
- 💧 Durable construction

Specifications

Material (housing)	Polypropylene
Material (cap)	Reinforced polypropylene
Material (o-ring)	Buna-N
Material (pressure relief)	300-series stainless steel, EPDM, and polypropylene
Maximum temperature	52°C/125°F
Maximum pressure	125 psi

NOTE: 10" and 20" standard units are available in white, black, almond, clear, and blue, with 1/4", 3/8", 1/2", 3/4" and 1". Please add PR to the end of a part number for pressure relief option.

Pure Aqua, Inc.[®]

Water Treatment and Reverse Osmosis Systems

sales@pureaqua.com

Tel: +1-714-432-9996

www.pureaqua.com

Fax: +1-714-432-9898



Authorized Dealer: