Cartridge Filters

Spun Polypropylene Sediment Filter Cartridges

Pure Aqua's spun polypropylene sediment filters are constructed of multi-layers for superior depth filtration. The graded density construction captures particles throughout the entire cross section of the cartridge and reduces surface binding. The cartridges combine quality and cost effectiveness to provide excellent filtration value. Available in a variety of micron ratings and sizes. Pure Aqua's spun polypropylene sediment filters meet NSF standards.

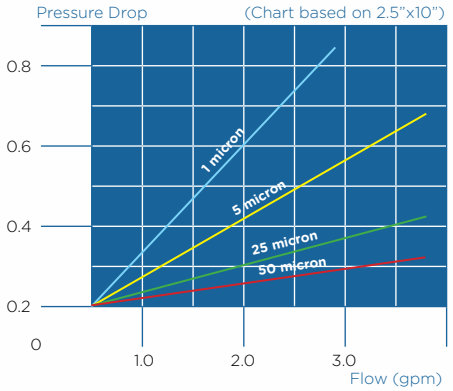

Applications

- Reverse osmosis pre-filtration
- Food & beverage industry
- Potable water
- Electronics
- Residential
- Fine chemicals
- Plating
- Metal finishing
- Car wash

Features & Benefits

- Multi-layers graded density
- Excellent chemical resistance
- Low cost
- High dirt holding capacity
- Wide range of micron ratings
- Wide range of sizes

2.5" Diameter

Part Number	Micron	Length	Case qty
PA-101	1	9-7/8"	50
PA-201	1	20"	25
PA-301	1	30"	25
PA-401	1	40"	25
PA-105	5	9-7/8"	50
PA-205	5	20"	25
PA-305	5	30"	25
PA-405	5	40"	25
PA-1025	25	9-7/8"	50
PA-2025	25	20"	25
PA-1050	50	9-7/8"	50

Specifications

Material	Polypropylene	
Length	9-7/8" - 40"	
Maximum temperature	60°C / 140°F	
Micron rating (nominal)	1 - 50	
Maximum flow rate	2 - 28 gpm (2.5" diameter)	10 - 30 gpm (4.5" diameter)
Cartridge packaging	Shrink wrapped	

4.5" Diameter

Part Number	Micron	Length	Case qty
PA-101-B	1	9-7/8"	24
PA-201-B	1	20"	12
PA-105-B	5	9-7/8"	24
PA-205-B	5	20"	12
PA-1025-B	25	9-7/8"	24
PA-2025-B	25	20"	12