

PULSAtron® Series C

Specifications and Model Selection

MODEL		LC02	LC03	LC04	LC54
Capacity nominal (max.)	GPH	0.25	0.50	1.00	1.25
	GPD	6	12	24	30
	LPH	0.9	1.9	3.8	4.7
Pressure (max.)	PSIG	80	80	80	80
	BAR	5.6	5.6	5.6	5.6
Connections:	Tubing	1/4" ID X 3/8" OD 3/8" ID X 1/2" OD			
	Piping	1/4" FNPT			

Engineering Data

Pump Head Materials Available: GFPPPL
PVC
PVDF
316 SS
PTFE-faced CSPE-backed

Diaphragm: PTFE-faced CSPE-backed

Check Valves Materials Available:
Seats/O-Rings: PTFE
CSPE
Viton

Balls: Ceramic
PTFE
316 SS
Alloy C

Fittings Materials Available: GFPPPL
PVC
PVDF

Bleed Valve: Same as fitting and check valve selected, except 316SS

Injection Valve & Foot Valve Assy: Same as fitting and check valve selected

Tubing: Clear PVC
White PE


Important: Material Code - GFPPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

Engineering Data

Reproducibility: +/- 3% at maximum capacity
Viscosity Max CPS: 1000 CPS
Stroke Frequency Max SPM: 125
Stroke Length Turn-Down Ratio: 10:1
Power Input: 115 VAC/50-60 HZ/1 ph
230 VAC/50-60 HZ/1 ph

Average Current Draw:
@ 115 VAC; Amps: 0.6 Amps
@ 230 VAC; Amps: 0.3 Amps @ 230 VAC
Peak Input Power: 130 Watts
Average Input Power @ Max SPM: 50 Watts

Custom Engineered Designs – Pre-Engineered Systems

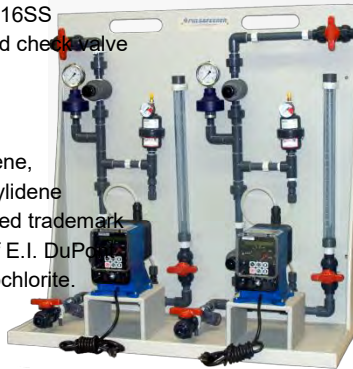

Pre-Engineered Systems

Pulsafeeder's Pre-Engineered Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.

Dimensions

Series C Dimensions (inches)						
Model No.	A	B	C	D	E	Shipping Weight
LC02	5.0	9.6	9.5	6.5	8.2	10
LC03	5.0	9.9	9.5	6.5	8.5	10
LC04	5.0	9.9	9.5	6.5	8.5	10
LC54	5.0	9.9	9.5	6.5	8.5	10

NOTE: Inches X 2.54 = cm

